

PRODUCTIVE SOLUTIONS

The Genie® Runabout™ (GR™) is a compact, low-weight machine that's well suited for increasing productivity on the job. The efficient operation and convenient setup of the Runabout™ make it ideal for warehousing, stock-picking, transporting, inventory management, general maintenance and construction.



DRIVING AND STEERING

Features include zero inside turning radius, 30% gradeability, a spring-applied hydraulically released brake system and 10 in (25 cm) non-marking solid rubber tires. The unit is also driveable when fully elevated for increased productivity.

EASY CONTROL AND SERVICE

Platform controls are equipped with on-board diagnostics. Auxiliary platform lowering enables descent in the event of a power failure. Proportional lift and drive controls provide a smooth ride. Plus, hinged rear covers allow easy access to all major components for convenient servicing.

A zero inside turning radius and full elevation drive feature deliver maximum productivity.



ADJUSTABLE WORKSTATION TRAY

All Stock Picker™ models come standard with a workstation tray that is adjustable from inside the platform.




COMPACT ACCESSIBILITY

Narrow 2 ft 5.5 in to 2 ft 7.5 in (75 to 80 cm) width and 4 ft 5 in (1.35 m) length allows the unit to fit in most passenger elevators. Unit can be driven through doorways with operator on board and has 2.5 in (6 cm) ground clearance in stowed position. Low 15 in (38 cm) entry height.

GENIE® RUNABOUT™ MODELS AVAILABLE

GR™-12 | GR™-15 | GR™-20

Specifications

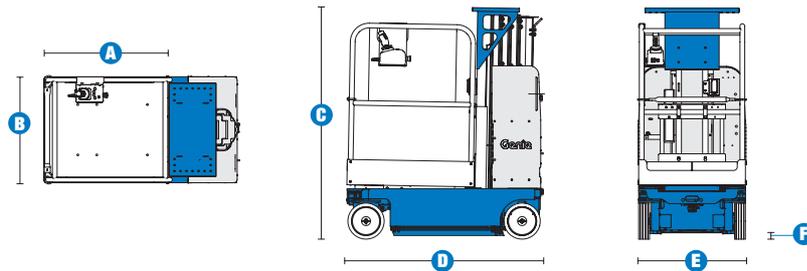

MODELS	GR™-12		GR™-15		GR™-20	
MEASUREMENTS	US	Metric	US	Metric	US	Metric
Working height*	17 ft 5 in	5.48 m	20 ft 8 in	6.47 m	25 ft 11 in	8.07 m
Platform height	11 ft 5 in	3.48 m	14 ft 8 in	4.47 m	19 ft 11 in	6.07 m
A B Platform dimensions (length x width)						
Standard	35 x 29.5 in	.89 x .75 m	35 x 29.5 in	.89 x .75 m	35 x 29.5 in	.89 x .75 m
Standard with extension	55 x 29.5 in	1.4 x .75 m	55 x 29.5 in	1.4 x .75 m	55 x 29.5 in	1.4 x .75 m
Stock picker	35 x 28.75 in	.89 x .73 m	35 x 28.75 in	.89 x .73 m	35 x 28.75 in	.89 x .73 m
Stock picker w/adjustable tray	56 x 28.75 in	1.4 x .73 m	56 x 28.75 in	1.4 x .73 m	56 x 28.75 in	1.4 x .73 m
Standard AWP****	27 x 26 in	.69 x .66 m	27 x 26 in	.69 x .66 m	27 x 26 in	.69 x .66 m
Narrow AWP****	26 x 20 in	.66 x .51 m	26 x 20 in	.66 x .51 m	26 x 20 in	.66 x .51 m
C Height - stowed	5 ft 2 in	1.57 m	5 ft 2 in	1.57 m	6 ft 6 in	1.98 m
D Length - stowed	4 ft 5 in	1.35 m	4 ft 5 in	1.35 m	4 ft 5 in	1.35 m
E Width	2 ft 5.5 in	.75 m	2 ft 5.5 in	.75 m	2 ft 7.5 in	.80 m
F Ground clearance - center	2.5 in	.06 m	2.5 in	.06 m	2.5 in	.06 m

PRODUCTIVITY						
Lift capacity	500 lbs	227 kg	500 lbs	227 kg	350 lbs	159 kg
Lift capacity - extension deck	250 lbs	113 kg	250 lbs	113 kg	250 lbs	113 kg
Drive speed - stowed	2.5 mph	4.0 km/h	2.5 mph	4.0 km/h	2.5 mph	4.0 km/h
Drive speed - raised	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h
Gradeability**	30%		30%		30%	
Turning radius - inside	zero		zero		zero	
- outside	4 ft 7 in	1.42 m	4 ft 7 in	1.42 m	4 ft 7 in	1.42 m
Raise / lower speed	20 / 18 sec	20 / 18 sec	21 / 19 sec	21 / 19 sec	24 / 21 sec	24 / 21 sec
Controls	24V DC proportional		24V DC proportional		24V DC proportional	
Tires - solid non-marking	10 x 3 x 8 in	25 x 8 x 20 cm	10 x 3 x 8 in	25 x 8 x 20 cm	10 x 3 x 8 in	25 x 8 x 20 cm

POWER						
Power source	24V (four 6V 225 Ah batteries)		24V (four 6V 225 Ah batteries)		24V (four 6V 225 Ah batteries)	
Hydraulic system capacity	2.2 gal	8.33 L	2.2 gal	8.33 L	2.2 gal	8.33 L

WEIGHT***						
	1,581 lbs	717 kg	2,192 lbs	994 kg	2,451 lbs	1,112 kg

STANDARDS COMPLIANCE	ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10
----------------------	---

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

** Gradeability applies to driving on slopes. See operator's manual for details regarding slope rating.

*** Weight will vary depending on options and/or country standards.

**** Not available for CE

Features

EASILY CONFIGURED TO MEET YOUR NEEDS

PLATFORM OPTIONS

- Standard platform with gate and sliding midrail
- Extension platform with sliding midrail
- Extension platform with gate
- Stockpicker platform with dual side entry gates and adjustable tray
- Standard AWP platform with sliding midrail*
- Standard AWP platform with gate*
- Narrow AWP platform with gate*

POWER

- 24V (four 6V 225 Ah batteries)

TIRE

- Non-marking solid tires

STANDARD FEATURES

MEASUREMENTS

GR™-12

- 17 ft 5 in (5.48 m) working height
- 11 ft 5 in (3.48 m) platform height
- Up to 500 lb (227 kg) lift capacity

GR™-15

- 20 ft 8 in (6.47 m) working height
- 14 ft 8 in (4.47 m) platform height
- Up to 500 lb (227 kg) lift capacity

GR™-20

- 25 ft 11 in (8.07 m) working height
- 19 ft 11 in (6.07 m) platform height
- Up to 350 lb (159 kg) lift capacity

PRODUCTIVITY

- Work station tray (GR-12, GR-15 only)
- Standard platform with sliding midrail
- Auxiliary platform lowering
- Low 15 in (.38 m) platform entry height
- Patented rigid mast system
- Compact base 29.5 x 53 in (.75 m x 1.35 m) (GR-12, GR-15 only)
- Ground clearance 2.5 inches (stowed)
- Fully proportional lift and drive controls
- Battery charge indicator
- Onboard diagnostic system
- AC power to platform
- Descent and tilt alarm
- Zero inside turning radius
- Dual wheel brakes
- Hydraulic brake release
- Pothole protection
- Hinged rear covers for easy access to all major electrical and hydraulic components
- Tie down attachment points
- Large forklift pockets access
- Non-marking solid tires

POWER

- Automatic 25 amp battery charger



OPTIONS & ACCESSORIES

PRODUCTIVITY

- 20 in (.51 m) extension platform with sliding midrail
- 20 in (.51 m) extension platform with gate
- Stockpicker platform with dual side entry gates and adjustable tray
- Standard AWP platform with sliding midrail*
- Standard AWP platform with gate*
- Narrow AWP platform with gate*
- Stock picker rear parcel tray (GR-12 and -15)
- Stock picker bike rack
- Dual flashing beacons
- Motion alarm
- Fluorescent tube caddy
- Automotive horn

POWER

- 800 watt inverter (120-230V AC/50-60 Hz)
- Maintenance-free batteries

*Not available for CE

Working At Height Limited

(Southern Office)
Amberley Court
Old Elstead Road
Milford
Surrey
GU8 5EB

Tel: 01483 415 410
Fax: 01483 417 719

Working At Height Limited

(Northern Office)
The Portergate
Ecclesall Road
Sheffield
South Yorkshire
S11 8NX

Tel: 0114 209 6206
Fax: 0114 209 6001

Suppliers of:

Powered Access Platforms
Aerial Work Platforms
Runabout Access Platforms
Scissor Lifts
Articulating Boom Access Platforms
Telescopic Boom Access Platforms
Material Lifts
Telehandlers
MEWPS Training