



AH8831 SD | AH8841 SD ROUGH TERRAIN SCISSOR LIFTS

Full-Size Rough Terrain Scissor Lifts deliver huge platforms, soaring work heights and heavy duty capacities— all in one package! The 8831 SD and 8841 SD feature working heights of 11.45 m and 14.50 m respectively. Both models are equipped with standard independent/auto leveling outriggers, are drivable at full height, with capacities ranging to 909 kg allowing for maximized productivity.

An easily accessible Kubota diesel engine powers a robust axle based 4WD system with “no-spin” and limited slip differentials, delivering excellent job site terrainability.



WORKINGATHEIGHT

ROUGH TERRAIN SCISSOR LIFTS


SPECIFICATIONS

AH8831 SD

AH8841 SD

2006/42/CE

A Work Height	11.45 m	14.50 m
B Raised Platform Height	9.45 m	12.50 m
C Lowered Platform Height	1.50 m	1.75 m
D Overall Width	2.20 m	2.20 m
E Overall Length	3.53 m	3.53 m
F Stowed Height (Rails Up)	2.67 m	2.90 m
G Stowed Height (Rails Down)	1.99 m	2.22 m
H Platform Width (Inside Dimension)	1.70 m	1.70 m
Platform Length Stowed (Inside Dimension)	3.40 m	3.40 m
I Platform Length Extended (Inside Dimension)	5.70 m	5.70 m
Ground Clearance	0.20 m	0.20 m
Wheelbase	2.27 m	2.27 m
Weight	5684 kg	6173 kg
Gradeability	30%	30%
Turning Radius (Inside)	4.01 m	4.01 m
Turning Radius (Outside)	6.30 m	6.30 m
Lift Time (With Rated Load)	46 sec	71 sec
Drive Speed (Stowed)	4.5 km/h	4.5 km/h
Drive Speed (Raised)	0.4 km/h	0.4 km/h
Maximum Drive Height	Full	Full
Capacity (Overall)	909 kg	681 kg
Maximum # of Persons	6	5

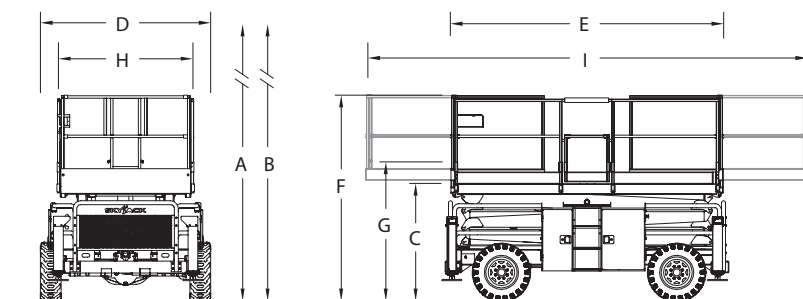

STANDARD FEATURES

- Axle based 4WD
- "No Spin" rear differential and limited slip front differential
- Disc brake system on rear axle
- 29hp Kubota Diesel engine on roll out tray
- Independent/auto levelling outriggers
- Self-centering scissor design
- Dual 1.22 m roll out extension decks
- Analog control system
- Colour coded and numbered wiring system
- 30% Gradeability
- Grip lug, foam-filled tires
- Wiring for AC outlet on platform
- Tilt alarm with drive & lift cut-out
- Overload sensing system
- Flashing light
- Operator horn
- Fold down hinged railing system
- Half height spring hinged gates on sides
- Lanyard attachment points
- Scissor guards
- Tie down/lift lugs

OPTIONS†

- Dual 1.22 m powered extension decks
- Diesel scrubber
- Airline to platform
- 3.5kW hydraulic generator
- Full height spring hinged gates
- Non-marking grip lug foam-filled tyres
- All motion audible alarm

† Capacities, and machine weights may differ when options are added

Model	Capacity With 2 Extension Decks*		
	Main	Front Ext.	Rear Ext.
AH8831	454 kg	227 kg	227 kg
AH8841	227 kg	227 kg	227 kg

Working At Height Limited

(Southern Office)
Amberley Court
Old Elstead Road
Milford
Surrey
GU8 5EB

Tel: 01483 415 410
Fax: 01483 417 719

Working At Height Limited

(Northern Office)
The Portergate
Ecclesall Road
Sheffield
South Yorkshire
S11 8NX

Tel: 0114 209 6206
Fax: 0114 209 6001

Suppliers of:

Powered Access Platforms
Aerial Work Platforms
Runabout Access Platforms
Scissor Lifts
Articulating Boom Access Platforms
Telescopic Boom Access Platforms
Material Lifts
Telehandlers
MEWPS Training