

ELECTRIC SCISSOR LIFTS



ELECTRIC SCISSOR LIFTS

TECHNICAL DATA	AHS 14
Working height	13.85 m
Platform height	11.85 m
Lift capacity	350 kg
Platform length - outside	2.31 m
Platform length - extended	3.23 m
Length - extension	0.92 m
Platform width - outside	1.2 m
Storage height	2.08 m
C Height - stowed	2.5 m
B Overall width	1.2 m
E Length	2.49 m
Wheelbase	1.86 m
G Ground clearance - Center	13 cm
Ground clearance - Pothole guards deployed	2.3 cm
Drive speed	0.9 - 2.7 km/h
Driveable at full height up to	11.85 m
Gradeability	23 %
Tilt	2° / 3°
Lift / lower speed	61 s / 50 s
Turning radius - outside	2.38 m
Non-marking tires	15 x 5
Batteries	24 V - 340 Ah (C20)
Hydraulic system capacity	25
Weight	3 168 kg

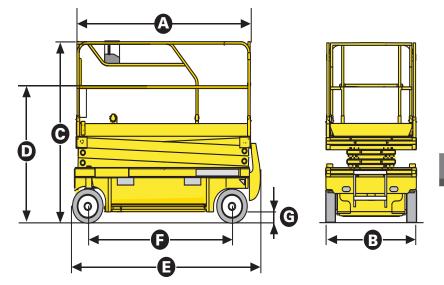

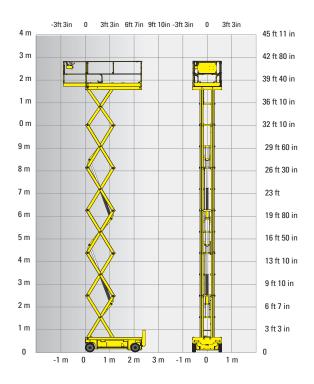

STANDARD EQUIPMENT

Pothole guards

Battery charge indicator

Proportional lift and drive

Removable control box in platform

Swing out component tray

Battery charger with automatic stop

Solid non-marking tyres

Brake release

Tilt controller

Load Management System in the platform

Manual platform lowering valve

Integrated forklift pockets

Towing hooks

Horn

Hourmeter

OPTIONS AND ACCESSORIES

Flashing light
Travel alarm
Working light
Power to platform
Biodegradable hydraulic oil
Centralised battery fi lling

Working At Height Limited

(Southern Office) Amberley Court Old Elstead Road Milford Surrey GU8 5EB

Tel: 01483 415 410 Fax: 01483 417 719

Working At Height Limited

(Northern Office) The Portergate Ecclesall Road Sheffield South Yorkshire S11 8NX

Tel: 0114 209 6206 Fax: 0114 209 6001

Suppliers of:

Powered Access Platforms
Aerial Work Platforms
Runabout Access Platforms
Scissor Lifts
Articulating Boom Access Platforms
Telescopic Boom Access Platforms
Material Lifts
Telehandlers
MEWPS Training