

# SELF-PROPELLED SCISSORS | ELECTRIC

## MAXIMIZE YOUR PRODUCTIVITY

Genie® self-propelled electric scissor lifts are the industry solution for increasing worksite productivity. Ideal for maneuvering in tight spaces, they're excellent for indoor and outdoor construction, maintenance and installation applications with firm, level surfaces. Characterized by low noise levels, these lifts provide excellent capacity and maximum platform workspace.

### EASY SERVICE

On-board diagnostics help operators troubleshoot on the fly and make adjustments in the field to maximize uptime. Swing-out battery box and power module trays allow easy access to engine components for convenient service.



### SIMPLE ACCESS

These compact units easily pass through standard single or double doors. Solid non-marking tires are standard (except GS-2668 DC and GS-3268 DC models).



**The Genie® slab scissors family has been completely updated with features that enhance reliability, serviceability and performance.**



### CONVENIENT OPERATION

Low-emission electric scissors deliver a quiet, convenient method for operation in sound-sensitive environments like office buildings, shopping malls, hotels, schools and more. Gain access to even loftier jobs with the GS™-3232, which provides working heights up to 38 ft (11.75 m) while fitting into spaces as narrow as 32 in (81 cm) wide.



### OUTDOOR FUNCTIONALITY

Electric self-propelled scissors offer outdoor functionality on firm, level surfaces, providing accessibility for a wide variety of applications.



### COMPACT MANEUVERABILITY

All models have front-wheel drive and most models feature zero inside turning radius for excellent maneuverability in tight spaces like congested construction sites, elevators and narrow aisles.

### ELECTRIC MODELS AVAILABLE

SINGLE-DOOR ACCESS

GS™-1530

GS™-1930

GS™-2032

GS™-2632

GS™-3232

DOUBLE-DOOR ACCESS

GS™-2046

GS™-2646

GS™-3246

GS™-2668 DC

GS™-3268 DC

# Specifications

MODELS	GS™-1532		GS™-1932	
	Metric	US	Metric	US
Working height maximum*	6.57 m	21 ft	7.79 m	25 ft
<b>A</b> Platform height maximum	4.57 m	15 ft	5.79 m	19 ft
<b>B</b> Platform length - outside	1.63 m	5 ft 4 in	1.63 m	5 ft 4 in
extended	2.54 m	8 ft 4 in	2.54 m	8 ft 4 in
Slide-out platform extension deck	91 cm	3 ft	91 cm	3 ft
<b>C</b> Platform width - outside	74 cm	2 ft 5 in	74 cm	2 ft 5 in
Guardrail height:	1.10 m	3 ft 7 in	1.10 m	3 ft 7 in
Toeboard height	15 cm	6 in	15 cm	6 in
<b>D</b> Height - stowed: fixed rails	1.96 m	6 ft 5 in	2.00 m	6 ft 7 in
folding guardrails	2.03 m	6 ft 8 in	2.11 m	6 ft 11 in
rails folded	1.73 m	5 ft 8 in	1.75 m	5 ft 9 in
<b>E</b> Length - stowed	1.83 m	6 ft	1.83 m	6 ft
Length - stowed extended	2.74 m	9 ft	2.74 m	9 ft
<b>F</b> Width	81.3 cm	2 ft 8 in	81.3 cm	2 ft 8 in
<b>G</b> Wheelbase	1.32 m	4 ft 4 in	1.32 m	4 ft 4 in
<b>H</b> Ground clearance - centre	6 cm	2.4 in	6 cm	2.4 in
<b>I</b> - with pothole guards deployed	2 cm	.75 in	2 cm	.75 in

## PRODUCTIVITY

Max platform occupancy (indoor/outdoor)	2/2	2/2	2/2	2/2
Lift capacity	272 kg	600 lbs	227 kg	500 lbs
Drive speed - stowed	4.0 km/h	2.5 mph	4.0 km/h	2.5 mph
Drive speed - raised	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph
Gradeability**	30%	30%	30%	30%
Turning radius - inside	zero	zero	zero	zero
Turning radius - outside	1.55 m	5 ft 1 in	1.55 m	5 ft 1 in
Raise / lower speed	16 / 29 sec	16 / 29 sec	16 / 25 sec	16 / 25 sec
Controls	proportional		proportional	
Drive	dual front wheel		dual front wheel	
Multiple disc brakes	dual rear wheel		dual rear wheel	
Tyres - solid non-marking	30 x 11 x 20 cm	12 x 4.5 x 8 in	30 x 11 x 20 cm	12 x 4.5 x 8 in

## POWER




Power source	24 V (four 6 V 225 Ah batteries)	24 V (four 6 V 225 Ah batteries)
Hydraulic system capacity	14.2 L	3.75 gal

## WEIGHT\*\*\*

	1,233 kg	2,718 lbs	1,498 kg	3,302 lbs
--	----------	-----------	----------	-----------

## STANDARDS COMPLIANCE

CE EN280, PB-10-611-03

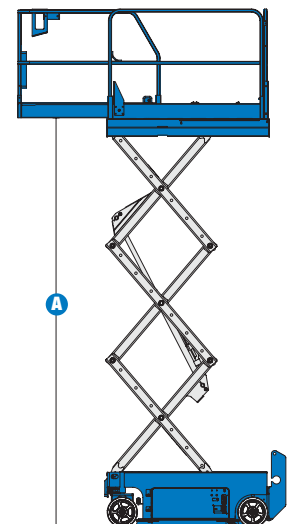

## Features

### STANDARD FEATURES

#### MEASUREMENTS

##### GS™-1532

- 6.57 m (21 ft) working height
- Up to 272 kg (600 lb) lift capacity

##### GS™-1932

- 7.79 m (25 ft) working height
- Up to 227 kg (500 lb) lift capacity

#### PRODUCTIVITY

- 1.63 m x 74 cm (64 in x 29 in) steel platform
- Folding rails with half-height swing gate
- 91 cm (3 ft) extension deck
- Dual front wheel drive
- Proportional lift and drive
- Automatic battery charger
- 30% gradeability
- Platform control with battery charge indicator and diagnostic display
- AC power to platform
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Rear wheel multiple disc brakes
- Front wheel hydraulic dynamic braking
- Brake release
- Solid non-marking tyres
- Pothole guards
- Tilt level sensor with audible alarm
- Descent alarm
- Electronic horn
- Hour meter
- Certified load sensor

#### POWER

- 24 V DC (four 6 V 225 Ah batteries)



### OPTIONS & ACCESSORIES

#### PRODUCTIVITY

- Platform swing gate, half height
- Air line to platform
- Dual flashing beacons
- Motion package
- Platform work lights
- Automotive horn

#### POWER

- Power inverter
- Maintenance-free batteries

#### Working At Height Limited

(Southern Office)  
Amberley Court  
Old Elstead Road  
Milford  
Surrey  
GU8 5EB

Tel: 01483 415 410  
Fax: 01483 417 719

#### Working At Height Limited

(Northern Office)  
The Portergate  
Ecclesall Road  
Sheffield  
South Yorkshire  
S11 8NX

Tel: 0114 209 6206  
Fax: 0114 209 6001

#### Suppliers of:

Powered Access Platforms  
Aerial Work Platforms  
Runabout Access Platforms  
Scissor Lifts  
Articulating Boom Access Platforms  
Telescopic Boom Access Platforms  
Material Lifts  
Telehandlers  
MEWPS Training