


Specifications

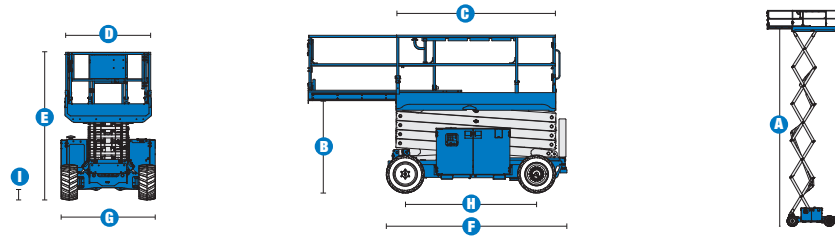

MODELS	GS™-2669 DC		GS™-3369 DC		GS™-4069 DC	
MEASUREMENTS	Metric	US	Metric	US	Metric	US
Working height maximum*	9.9 m	32 ft	11.96 m	39 ft	14.2 m	46 ft
A Platform height maximum	7.9 m	26 ft	9.96 m	32 ft 8 in	12.2 m	40 ft
B Platform height - stowed	1.47 m	4 ft 10 in	1.47 m	4 ft 10 in	1.65 m	5 ft 5 in
C Platform length - outside	2.79 m	9 ft 2 in	2.79 m	9 ft 2 in	2.79 m	9 ft 2 in
- extended	3.71 m	12 ft 2 in	3.71 m	12 ft 2 in	3.71 m	12 ft 2 in
Slide-out platform extension deck	0.91 m	3 ft	0.91 m	3 ft	0.91 m	3 ft
D Platform width - outside	1.6 m	5 ft 3 in	1.6 m	5 ft 3 in	1.6 m	5 ft 3 in
Toeboard height	0.15 m	6 in	0.15 m	6 in	0.15 m	6 in
E Height - stowed**	2.59 m	8 ft 6 in	2.59 m	8 ft 6 in	2.74 m	9 ft
rails lowered	1.92 m	6 ft 3.5 in	1.92 m	6 ft 3.5 in	2.08 m	6 ft 10 in
F Length - stowed	3.12 m	10 ft 3 in	3.12 m	10 ft 3 in	3.12 m	10 ft 3 in
platform extended	3.9 m	12 ft 10 in	3.9 m	12 ft 10 in	3.9 m	12 ft 10 in
with outriggers	3.76 m	12 ft 4 in	3.76 m	12 ft 4 in	3.76 m	12 ft 4 in
G Width	1.75 m	5 ft 9 in	1.75 m	5 ft 9 in	1.75 m	5 ft 9 in
H Wheelbase	2.29 m	7 ft 6 in	2.29 m	7 ft 6 in	2.29 m	7 ft 6 in
I Ground clearance - center	0.24 m	9.5 in	0.24 m	9.5 in	0.24 m	9.5 in

PRODUCTIVITY						
Maximum platform occupancy (in/out)	4/4		4/2		3/2	
Lift capacity	680 kg	1,500 lbs	454 kg	1,000 lbs	363 kg	800 lbs
Drive height	Full height		Full height		Full height	
Drive speed - stowed	7.2 km/h	4.5 mph	7.2 km/h	4.5 mph	7.2 km/h	4.5 mph
Drive speed - raised	0.5 km/h	0.3 mph	0.5 km/h	0.3 mph	0.5 km/h	0.3 mph
Gradeability - stowed***	35%		35%		35%	
Maximum outrigger leveling:	Front/back uphill		5.3°/4.2°		5.3°/4.2°	
side to side	11.7°		11.7°		11.7°	
Turning radius - inside	2.11 m	83 in	2.11 m	83 in	2.11 m	83 in
Turning radius - outside	4.6 m	181.2 in	4.6 m	181.2 in	4.6 m	181.2 in
Raise/lower speed	34/31 sec		39/29 sec		61/28 sec	
Drive	two wheel		two wheel		two wheel	
Tyres - non marking rough terrain	30x66 cm	12x26 in	30x66 cm	12x26 in	30x66 cm	12x26 in

POWER						
Power source	48V DC (eight 6V batteries, 225 Ah capacity)		48V DC (eight 6V batteries, 225 Ah capacity)		48V DC (eight 6V batteries, 315 Ah capacity)	
Hydraulic system capacity	68.1 L	18 gal	68.1 L	18 gal	68.1 L	18 gal

SOUND & VIBRATION LEVELS						
Sound pressure level (ground workstation)	70 dBA	70 dBA	70 dBA	70 dBA	70 dBA	70 dBA
Sound pressure level (platform workstation)	79 dBA	79 dBA	79 dBA	79 dBA	79 dBA	79 dBA
Vibration	<2.5 m/s ²	<8 ft 2 in/s ²	<2.5 m/s ²	<8 ft 2 in/s ²	<2.5 m/s ²	<8 ft 2 in/s ²

WEIGHT****						
CE base machine	3,442 kg	7,588 lbs	3,623 kg	7,987 lbs	4,810 kg	10,604 lbs
The basic unit has the extension deck, no outriggers, non marking RT tyres, CE link guard and CE load sense						
Weight modifiers for options:						
Outriggers	add 392 kg	865 lbs	add 392 kg	865 lbs	add 392 kg	865 lbs

STANDARDS COMPLIANCE CE EN280, PB-10-611-03

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
 ** Based on RT non-marking tyres.
 *** Gradeability applies to driving on slopes. Gradeability may vary depending on the weight of options installed on machine. See Operator's Manual for details regarding slope ratings.
 **** Weight will vary depending on options and/or country standards

Features

STANDARD FEATURES

MEASUREMENTS

GS™-2669 DC

- 9.9 m (32 ft) working height
- Up to 680 kg (1,500 lb) lift capacity

GS™-3369 DC

- 11.96 m (39 ft) working height
- Up to 454 kg (1,000 lb) lift capacity

GS™-4069 DC

- 14.2 m (46 ft) working height
- Up to 363 kg (800 lb) lift capacity

PRODUCTIVITY

- AC sealed drive motors
- 2.79 x 1.6m (110 x 63 in) steel frame platform with replaceable aluminum deck
- 0.91 m (3 ft) extension deck
- Folding guardrails
- 2 speed lift and drive
- Onboard diagnostic system
- AC power to platform
- Full height swing gate
- 2 WD
- Front oscillating axle
- Positive traction control
- Regenerative braking
- Non-marking foam filled rough terrain tyres
- Tilt level sensor with audible alarm
- Descent alarm
- Horn
- Certified loadsensor

POWER

- 48V DC (eight 6V batteries)



OPTIONS & ACCESSORIES

PRODUCTIVITY

- Automatic levelling hydraulic outriggers
- Air line to platform
- Power to platform (incl. plug, socket/ground fault interrupt earth leakage on request)
- Dual flashing beacons
- Motion alarm

POWER OPTIONS

- 315 Ah batteries (standard on GS™-4069 DC)

Working At Height Limited

(Southern Office)
Amberley Court
Old Elstead Road
Milford
Surrey
GU8 5EB

Tel: 01483 415 410
Fax: 01483 417 719

Working At Height Limited

(Northern Office)
The Portergate
Ecclesall Road
Sheffield
South Yorkshire
S11 8NX

Tel: 0114 209 6206
Fax: 0114 209 6001

Suppliers of:

Powered Access Platforms
Aerial Work Platforms
Runabout Access Platforms
Scissor Lifts
Articulating Boom Access Platforms
Telescopic Boom Access Platforms
Material Lifts
Telehandlers
MEWPS Training

www.workingatheightltd.com