

SELF-PROPELLED SCISSORS | ROUGH TERRAIN

BOOST YOUR PERFORMANCE AND POWER

Genie® rough terrain scissor lifts are tough, construction-oriented four-wheel drive machines with positive traction control — ideal for increasing productivity in demanding outdoor worksites. Competitive lift speed and large platforms maximize efficiency with the handling and capacity to get to the jobsite and finish working faster.



SPEED AND TRACTION

Genie® RT scissor lifts are able to traverse through uneven or rough terrain environments more efficiently. They are equipped with four-wheel drive and positive traction control for traction when you need it most. They offer up to 50% gradeability when driving on slopes.

FOLD-DOWN CONVENIENCE

Heavy duty fold-down guardrails and a removable rear platform railing allow increased accessibility for loading and unloading the machine in trucks, containers and other situations with limited overhead space. These features also allow easy access through doorways.



Genie® RT models are built for the rental industry and built to last. They're designed to stand up to the rigors of frequent use in diverse worksite conditions.




MORE ROOM TO WORK

These units are ideal for jobs that require greater capacity for more workers, materials and tools. For added workspace, all RT models come standard with a multi-position slide-out extension deck on the front of the platform. A rear slide-out extension deck can be added to models GS™-3384 and up. In addition, power to the platform allows workers to use electrically powered tools.



EASY SERVICE

On-board diagnostics help operators troubleshoot on the fly and make adjustments in the field to maximize uptime. Plus, slide- or pull-out engine trays allow easy access to components — no need to reach around obstacles inside the machine. Many parts and service procedures are common across the entire Genie® scissors line for cost-effective parts stocking and maintenance efficiencies.

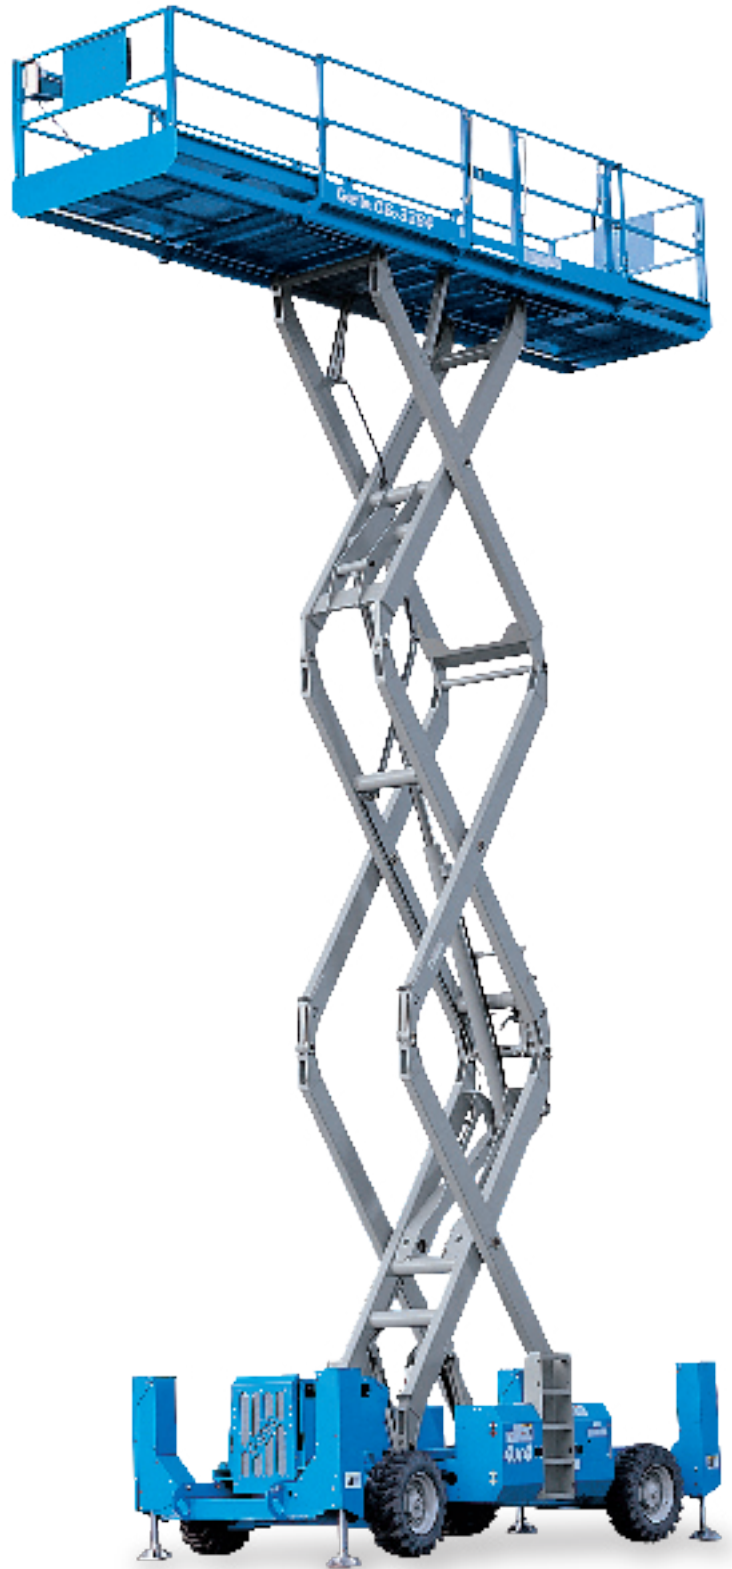

ROUGH TERRAIN MODELS AVAILABLE

GS™-2668 RT

GS™-3268 RT

GS™-3384 RT

GS™-3390 RT

GS™-4390 RT

GS™-5390 RT

Specifications

MODEL		GS™-3384 RT	
MEASUREMENTS	US	Metric	
Working height maximum*	39 ft	12.06 m	
A Platform height maximum	33 ft	10.06 m	
B Platform height - stowed**	5 ft 1 in	1.55 m	
C Platform length:	13 ft .5 in	3.98 m	
outside, extended - single deck	17 ft 6.25 in	5.34 m	
outside, extended - dual deck	21 ft 6.5 in	6.57 m	
D Slide-out platform extension deck - front	5 ft	1.52 m	
E Slide-out platform extension deck - rear	4 ft	1.22 m	
F Platform width - outside	6 ft	1.83 m	
G Height - stowed:			
folding guardrails	8 ft 9.5 in	2.68 m	
rails lowered	6 ft 6.75 in	2.0 m	
H Length - stowed:			
single deck	12 ft 11.25 in	3.94 m	
dual deck	13 ft 5 in	3.98 m	
with outriggers	16 ft	4.88 m	
I Width:			
standard tires	7 ft	2.13 m	
high flotation tires	7 ft 11 in	2.41 m	
J Wheelbase	9 ft 4 in	2.84 m	
K Ground clearance - center	13 in	.33 m	


PRODUCTIVITY		
Maximum platform occupancy	7	7
Lift capacity	2,500 lbs	1,134 kg
Lift capacity - extension deck	500 lbs	227 kg
Drive speed - stowed	4.0 mph	6.4 km/h
Drive speed - raised	0.7 mph	1.1 km/h
Gradeability - stowed***	50%	
Maximum outrigger leveling:		
front to back	7°	
side to side	12°	
Turning radius - inside	10 ft 1.5 in	3.09 m
Turning radius - outside	19 ft 6 in	5.94 m
Raise/lower speed	45/29 sec	
Controls	proportional	
Drive	four wheel	
Tires - foam-filled rough terrain	10 x 31 in	25 x 79 cm

POWER		
Power source	Ford DSG-423 4 cylinder gas/LPG 75 hp (56 kW)	
	Deutz F3L-1011 3 cylinder diesel 49 hp (36 kW) air cooled	
Auxiliary Power unit	12 V DC	
Fuel tank capacity	30 gal	113.6 L
Hydraulic system capacity	30 gal	113.6 L

WEIGHT****		
	12,005 lbs	5,445 kg
with outriggers	13,680 lbs	6,205 kg

STANDARDS COMPLIANCE ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
 ** Based on RT tires. Deduct 2 in (5.8 cm) for turf and non-marking.
 *** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.
 **** Weight will vary depending on options and/or country standards.

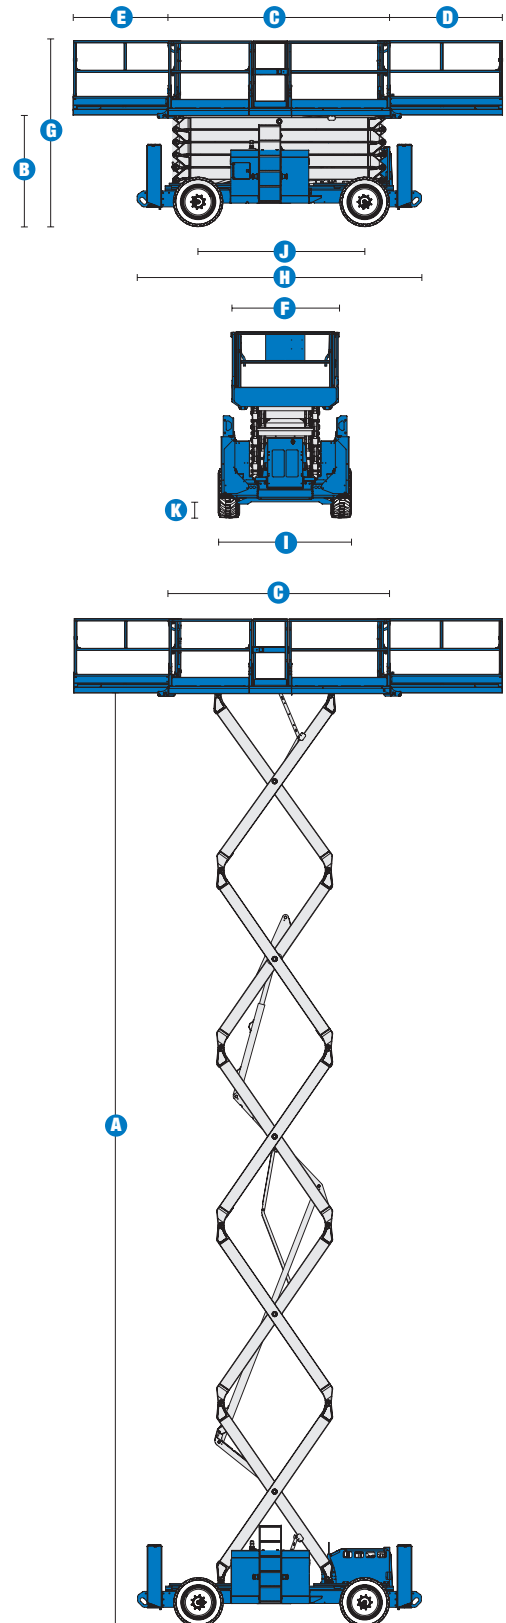

Features

STANDARD FEATURES

MEASUREMENTS

- 39 ft (12.06 m) working height
- Up to 2,500 lb (1,134 kg) lift capacity

PRODUCTIVITY

- 156.5 x 72 in (3.98 x 1.83 m) steel platform
- 60 in (1.52 m) extension deck
- Diamond plate deck
- Folding guardrails
- Proportional lift and drive
- Onboard diagnostic system
- AC power to platform
- Full height swing gate
- Two self-closing gates
- 4WD
- Positive traction control
- Four-wheel braking
- Slide-out engine tray
- Foam-filled rough terrain tires
- Tilt level sensor with audible alarm
- Descent alarm
- Horn
- Hour meter

POWER

- 12 V DC auxiliary power


OPTIONS & ACCESSORIES

PRODUCTIVITY

- Dual slide-out platform extension deck package 5 ft (1.52 m) front and 4 ft (1.22 m) rear
- Automatic leveling hydraulic outriggers
- Air line to platform
- Pipe cradle (pair)
- Non-marking rough terrain tires 10 x 31 in (25 x 79 cm)
- High flotation air-filled tires 17 x 33 in (43 x 84 cm)
- High flotation foam-filled tires 16 x 33 in (41 x 84 cm)
- Dual flashing beacons
- Motion alarm
- Platform work lights

POWER OPTIONS

- Ford gas/LPG 75 hp (56kW)
- Deutz diesel 49 hp (36kW)
- 2000 AC Watt generator (120V/60Hz)
- Cold weather package
- Arctic package
- Hydraulic oil cooler
- Diesel scrubber/spark arrestor
- Diesel spark arrestor (without scrubber)
- LPG steel tank only, 33.5 lb capacity
- Additional LPG tank and carrier

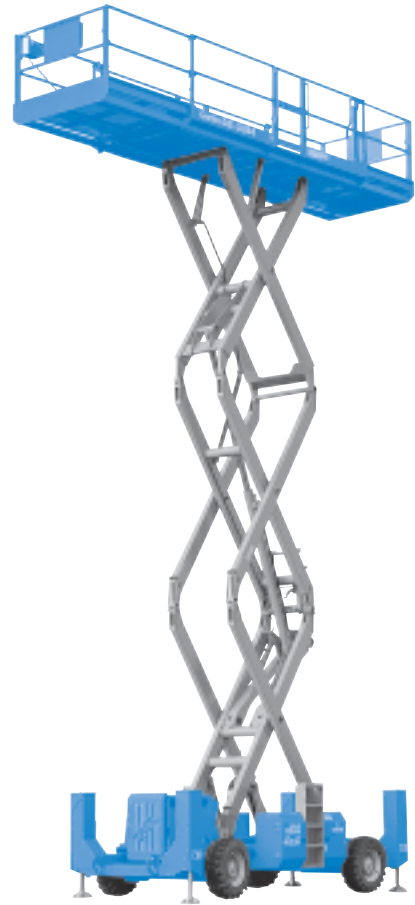

Working At Height Limited
(Southern Office)
Amberley Court
Old Elstead Road
Milford
Surrey
GU8 5EB

Tel: 01483 415 410
Fax: 01483 417 719

Working At Height Limited
(Northern Office)
The Portergate
Ecclesall Road
Sheffield
South Yorkshire
S11 8NX

Tel: 0114 209 6206
Fax: 0114 209 6001

Suppliers of:

Powered Access Platforms
Aerial Work Platforms
Runabout Access Platforms
Scissor Lifts
Articulating Boom Access Platforms
Telescopic Boom Access Platforms
Material Lifts
Telehandlers
MEWPS Training